

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 October 2005 (20.10.2005)

PCT

(10) International Publication Number
WO 2005/097659 A1

(51) International Patent Classification⁷: B66C 1/36

(21) International Application Number:
PCT/NO2005/000111

(22) International Filing Date: 1 April 2005 (01.04.2005)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20041439 6 April 2004 (06.04.2004) NO

(71) Applicant and

(72) Inventor: SVILAND, Per [NO/NO]; Sygnaveien 48, Svi-
land, N-4308 Sandnes (NO).

(74) Agent: HÅMSØ PATENTBYRÅ ANS, P.O. Box 171,
N-4302 Sandnes (NO).

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GR, GU, HT, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MY, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LI, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG)


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

Published:

— with international search report

[Continued on next page]

(54) Title: A LIFTING HOOK DEVICE

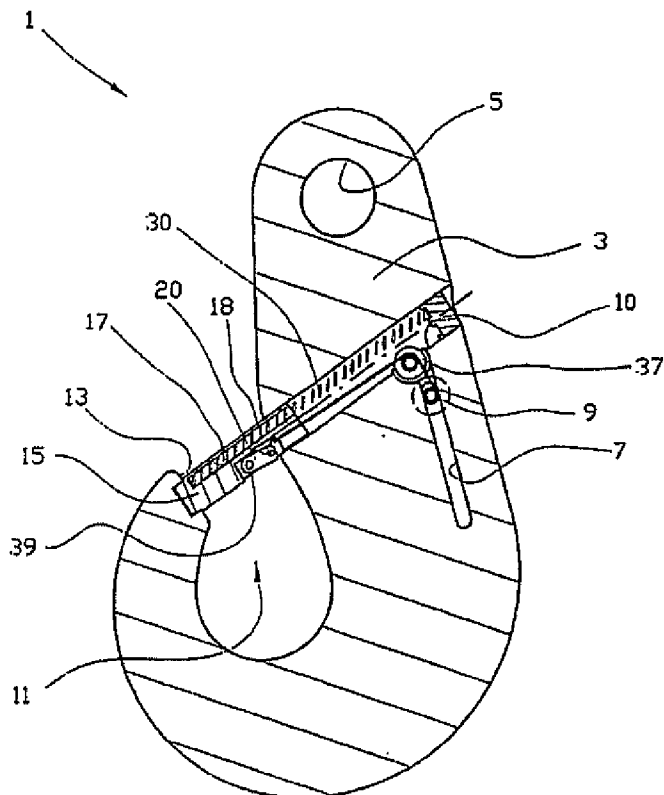

(57) Abstract: A hook (1) in a lifting device, where the hook is of the type where a lifting tool is placed in and released from the hook (1) through a hook opening (11), where the hook (1) is provided with a locking bolt (15) arranged to be displaced in the longitudinal direction for closing of the hook (1) opening (11), and where the hook (1) locking bolt (15) is locked into position when the hook opening is closed. The lock is released and the locking bolt (15) can be displaced away from the hook opening (11) by means of an actuating lever (9) arranged in the body (3) of the hook.



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the *PCT Gazette*.